

4

3

POWERPILL-THREADED

2


1

REV	DESCRIPTION OF CHANGE	ECN NO.	CHANGED BY	DATE

THREADED STEM GUIDE
W/ A VARIETY OF THREAD OPTIONS

OPTIONAL O-RING GROOVE

STEM HEIGHT

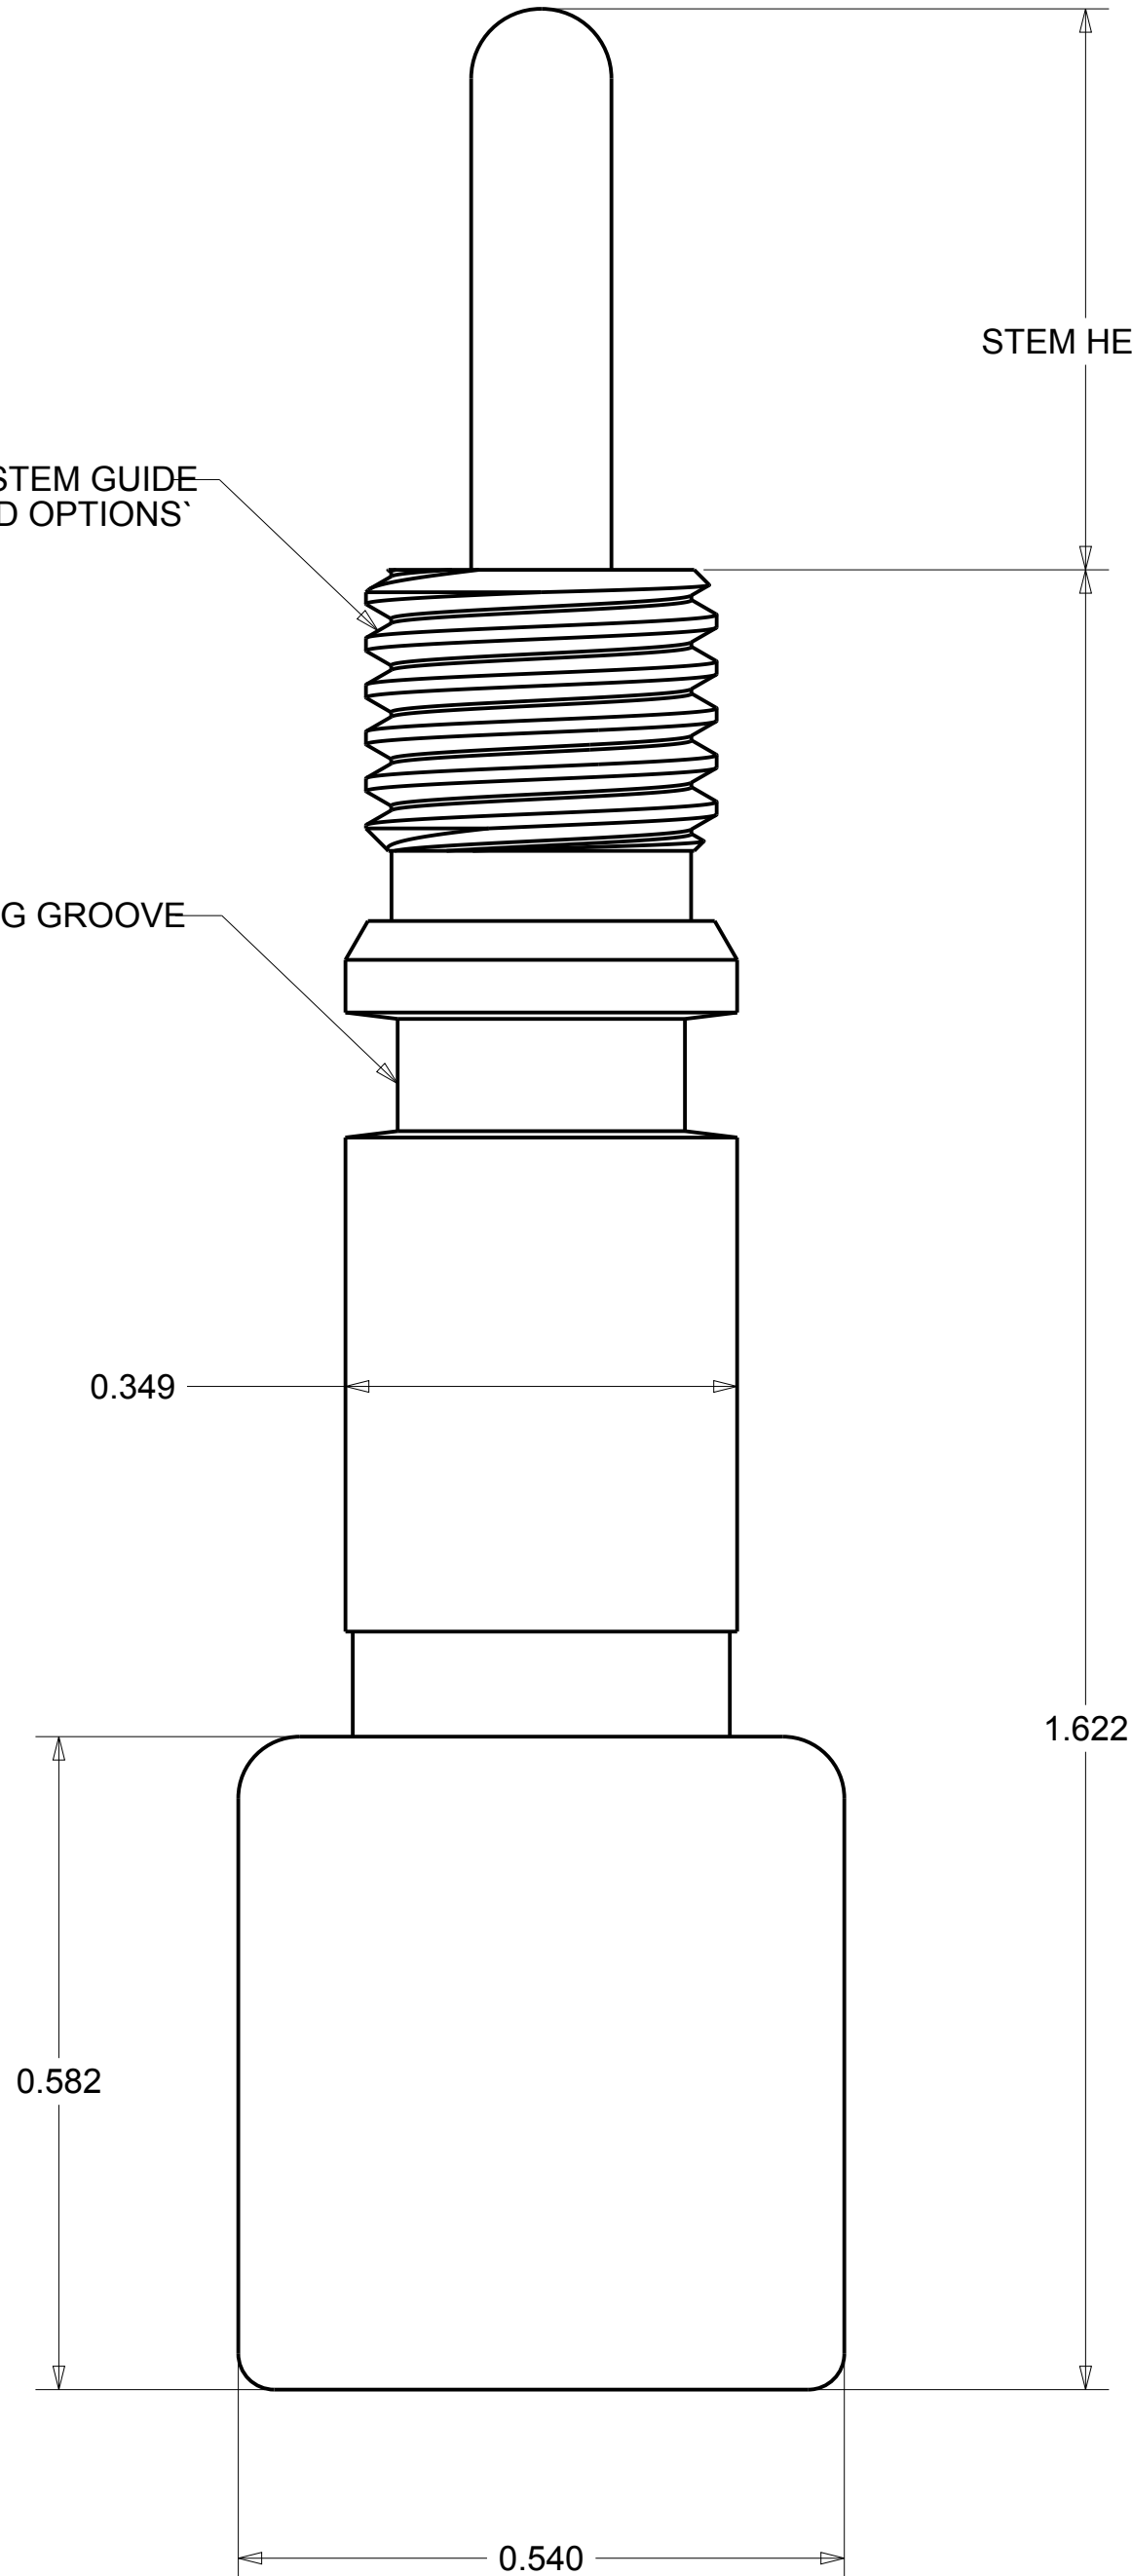

Key Features:

No Power Required: Enjoy seamless operation with no need for an external power source.

Plug-and-Play: Ready to use with no programming required.

Wide Temperature Range: Choose from a broad range of temperatures, from 65° F to 250° F, to suit your specific needs.

Customizable Stem Options: Adapt the stem height and overall length to match your application perfectly.

Reliable Stroke Performance: Offers a very repeatable stroke length between 0.250" and 0.350", depending on wax charge.

CIRCLED DIMENSIONS ARE IDENTIFIED AS MAJOR (XX.XX)

THIS PRINT AND THE INFORMATION CONTAINED HEREON IS A CONFIDENTIAL DISCLOSURE. THE SUBJECT MATTER OF WHICH IS PROPERTY OF KME, INC.



UNITS	S.A.E.
MATERIAL	N/A
SCALE	6.000
WEIGHT	LBS

POWERPILL
KEystone THREADED - 1.622

DRAWN BY	ENGINEER	CHECKED BY	THIRD ANGLE PROJECTION	POWERPILL-THREADED	REV
GW	GW	GW	CREO	SHEET	1
7-5-05	7-5-05	7-5-05		1 OF 2	1

SHEET SIZE C

4

3

2

1

POWERPILL-THREADED 1